




EverExceed®
power your applications

Electric Bicycle Motive Range





*»Premium quality for
uninterrupted communication«*




www.everexceed.com

EVEREXCEED specifically for electric bicycle, electric bicycle tailored design developed this series of batteries, The Electric bicycle Range has a number of national patents protection technology, is the world's leading high performance, long-life lead-acid accumulator.


Model	Rated voltage (V)	Rated capacity (Ah)	Length (mm)	Width(mm)	Height (mm)	Total height (mm)	Reference weight(Kg)
EV3-DZM-10	6	10	151	50	94	101	2.0
EV6-DZM-7	12	7	151	65	94	99	2.7
EV6-DZM-9	12	9	151	65	112	118	3.2
EV6-DZM-10A	12	10	115	90	124	130	3.8
EV6-DZM-10	12	10	151	99	94	101	4.2
EV6-DZMJ-10H	12	10	151	99	94	101	4.2
EV6-DZM-12	12	12	151	99	96	103	4.3
EV6-DZM-12C	12	12	151	99	96	103	4.2
EV6-DZM-14	12	14	151	99	106	110	4.9
EV8-DZM-14	16	14	201	113	100	105	6.8
EV6-DZM-16	12	16	151	99	123	125	5.6
EV6-DZM-17	12	17	181	77	167	167	6.3
EV6-DZM-20	12	20	181	77	170	175	7.0
EV8-DZM-20	16	20	250	100	127	130	9.5
EV6-DM-24	12	24	185	105	128	132	7.7
EV6-DZM-28	12	28	318	80	126	130	9.4
EV6-DZM-30	12	30	267	77	170	175	10.1




Discharge Characteristic Curve

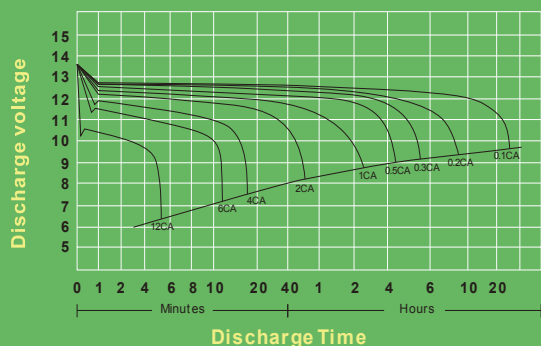


Discharge Characteristic Curve

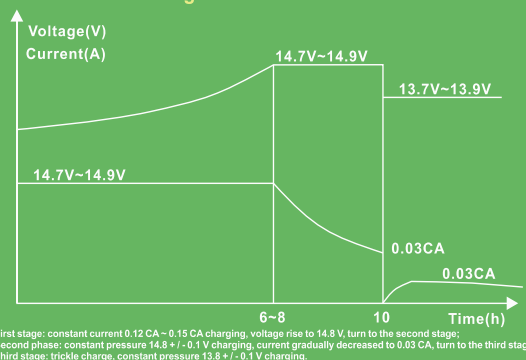


Discharge Characteristic Curve

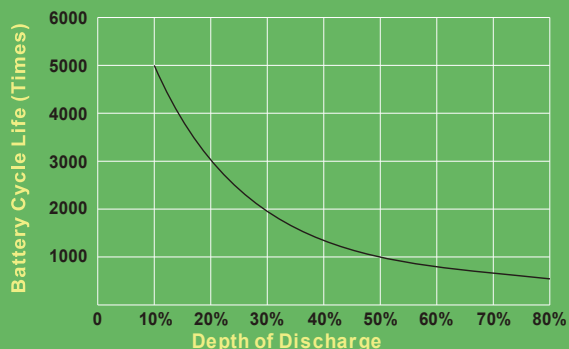




Capacity vs. Operating Temperature Curve

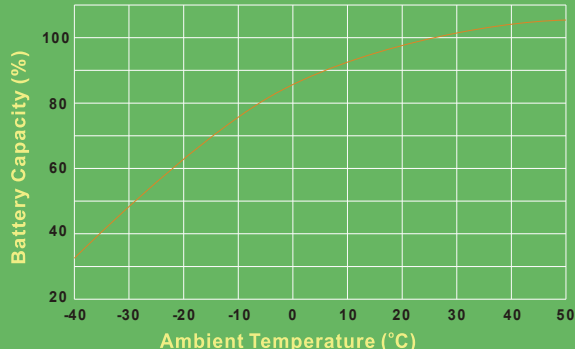

Charging Voltage vs. Ambient Temperature Curve

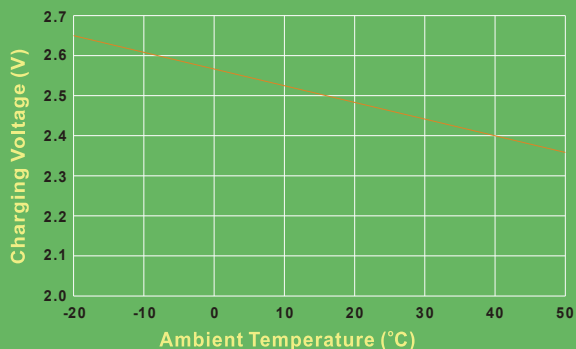

High Temperature Accelerated Life Test Curve

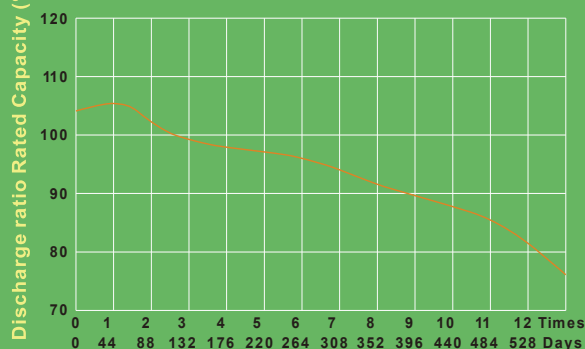



Powered by EverExceed®

Supplied Worldwide by
Everexceed Corporation

