

EXCELLENT CYCLING ABILITY



GL12-165

ADVANCED TECHNOLOGY

GELLED VALVE REGULATED
LEAD ACID BATTERY (GVR)
FOR CYCLING APPLICATIONS

12V 165AH @ 10 HR RATE to 1.80VPC

12V 189AH @ 20 HR RATE to 1.75VPC

LONG DURATION

FOR
TELECOMMUNICATION
SOLAR / PHOTOVOLTAIC
WIND GENERATION
MARINE
APPLICATIONS

Innovative Features

6V & 12V AGM blocs with gel;

Exceptional energy storage capacity combined with long life - BCI Classification;

Thick positive plate design for maximum service float life - 12 years design life @ 20°C(68°F);

Thickness positive plate plus optimized plate alloy to anti-corrosion;

Maintenance-free (no topping up) during the whole service life due to EverExceed Gel technology;

Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection;

Flame-arresting one-way pressure-relief vent for safe and long life;

Electrolyte in solid gel form will not stratify no equalization charge required;

Sulfuric acid thixotropic gel, gel powder from Europe leading supplier to ensure the unique performance of gel battery;

Increased durability and deep cycle ability for heavy duty applications;

Fully tank formed grid Lead Calcium Tin plate ensures voltage matching between cells;

Shelf life up to 2 years at 20°C (68°F), very low gassing due to internal gas recombination;

Can be used in any orientation. Upright, side or end mounting recommended;

Unique performance against high temperature;

UL Recognized component;


12 VOLTS - 165 AMPERE HOUR @ 20 HOUR RATE

AH Capacity to 1.80VPC @ 20°C (68°F)

End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.80	107	121	130	136	141	158	165	168	182	187	192	199	204

Gellyte Range VRLA

EverExceed[®]
power your applications

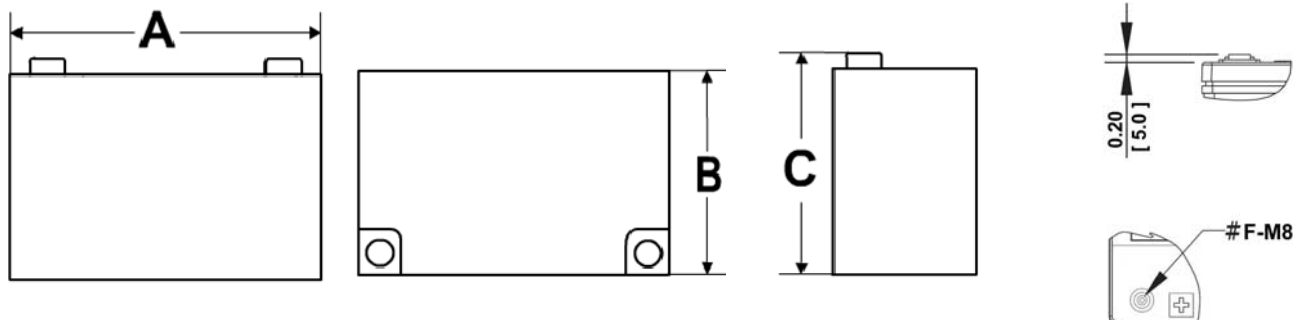

Length(A): 494mm Width(B): 206mm Height(C): 235mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	CCA @ -18°C (0°F)	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	120.8lbs 54.8kg	SG = 1.300	1071 Amps	4673 Amps	0.0028

Capacity	165 Ah @ 10 hr. rate to 1.80 volts per cell @ 20°C (68°F). 189 Ah @ 20 hr. rate to 1.75 volts per cell @ 20°C (68°F).
Applicable Operating Temperature Range	-40°C (-40°F) to +70°C (158°F).
Ideal Operating Temperature Range	+20°C (+68°F) to +32°C (90°F).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
Recommended Maximum Charging Current Limit	0.25C20 amperes (47.3 amperes @ 100% depth of discharge) @ 20 hr. rate to 1.75VPC.
Equalization and Cycle Service Charging Voltage	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 9.43 amperes RMS (C/20) to 1.75VPC.
Self Discharge	EverExceed Gellyte Range batteries may be stored for up to 24 months at 20°C (68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal.
Terminal Hardware Initial Torque: Inserted Terminal	11 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	131	110	79.8	63.4	52.8	37.1	30.6	26.1	17.1	14.8
1.80	136	116	84.2	66.8	55.6	39.1	32.5	27.9	18.1	15.5
1.75	138	119	86.0	68.0	56.8	39.9	33.3	28.3	18.7	15.8

Constant Current Discharging Ratings - Amperes Per Cell @ 20°C (68°F)													
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.85	68.1	56.4	41.3	32.3	26.9	18.6	15.5	13.1	8.56	7.34	3.82	2.65	1.99
1.80	71.1	60.5	43.4	34.1	28.3	19.7	16.5	14.0	9.12	7.77	3.99	2.76	2.04
1.75	73.1	62.0	44.8	34.8	29.1	20.4	16.9	14.3	9.43	7.94	4.10	2.80	2.08

Note: Batteries to be mounted with 0.39 in (1.00 cm) spacing minimum and free air ventilation.
Specifications subject to change without notification.