

EXCELLENT CYCLING ABILITY



GL 12-250

ADVANCED TECHNOLOGY

GELLED VALVE REGULATED
LEAD ACID BATTERY (GVR)
FOR CYCLING APPLICATIONS

12V 250AH @ 10 HR RATE to 1.80VPC

12V 286AH @ 20 HR RATE to 1.75VPC

LONG DURATION

FOR
TELECOMMUNICATION
SOLAR / PHOTOVOLTAIC
WIND GENERATION
MARINE
APPLICATIONS

Innovative Features

6V & 12V AGM blocs with gel;

Exceptional energy storage capacity combined with long life - BCI Classification;

Thick positive plate design for maximum service float life - 12 years design life @ 20°C(68°F);

Thickness positive plate plus optimized plate alloy to anti-corrosion;

Maintenance-free (no topping up) during the whole service life due to EverExceed Gel technology;

Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection;

Flame-arresting one-way pressure-relief vent for safe and long life;

Electrolyte in solid gel form will not stratify no equalization charge required;

Sulfuric acid thixotropic gel, gel powder from Europe leading supplier to ensure the unique performance of gel battery;

Increased durability and deep cycle ability for heavy duty applications;

Fully tank formed grid Lead Calcium Tin plate ensures voltage matching between cells;

Shelf life up to 2 years at 20°C (68°F), very low gassing due to internal gas recombination;

Can be used in any orientation. Upright, side or end mounting recommended;

Unique performance against high temperature;

UL Recognized component;



12 VOLTS - 250 AMPERE HOUR @ 20 HOUR RATE

AH Capacity to 1.80VPC @ 20°C (68°F)

End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.80	163	184	198	208	216	240	250	255	279	282	290	300	311

Gellyte Range VRLA

EverExceed®
power your applications

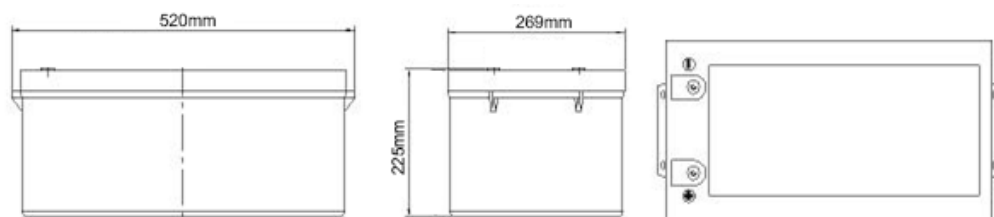

Length: 520mm Width: 269mm Height: 225mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	CCA @ -18°C (0°F)	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	159.4lbs 72.3kg	SG = 1.300	1575 Amps	6615 Amps	0.0020

Capacity	250 Ah @ 10 hr. rate to 1.80 volts per cell @ 20°C (68°F). 286 Ah @ 20 hr. rate to 1.75 volts per cell @ 20°C (68°F).
Applicable Operating Temperature Range	-40°C (-40°F) to +70°C (158°F).
Ideal Operating Temperature Range	+20°C (+68°F) to +32°C (90°F).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
Recommended Maximum Charging Current Limit	0.25C20 amperes (71.5 amperes @ 100% depth of discharge) @ 20 hr. rate to 1.75VPC.
Equalization and Cycle Service Charging Voltage	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 14.3 amperes RMS (C/20) to 1.75VPC.
Self Discharge	EverExceed Gellyte Range batteries may be stored for up to 24 months at 20°C (68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal.
Terminal Hardware Initial Torque: Inserted Terminal	11 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	197	172	122	96.5	80.3	56.5	46.7	39.8	26.1	22.4
1.80	208	176	129	102	84.7	59.5	49.4	42.3	27.7	23.6
1.75	212	180	131	104	86.3	60.5	50.4	43.1	28.3	23.9

Constant Current Discharging Ratings - Amperes Per Cell @ 20°C (68°F)													
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.85	103	86.4	62.4	48.9	40.7	28.3	23.5	19.9	13.0	11.2	5.85	4.03	3.00
1.80	108	92.1	65.8	52.0	43.2	30.0	25.0	21.3	13.9	11.7	6.04	4.17	3.11
1.75	112	93.6	67.9	53.2	44.4	30.9	25.7	21.9	14.3	12.0	6.22	4.27	3.17

Note: Batteries to be mounted with 0.39 in (1.00 cm) spacing minimum and free air ventilation.
Specifications subject to change without notification.